

(19)



Europäisches Patentamt

European Patent Office

Office de brevets



(11)

EP 1 091 503 A2

(12)

EUROPEAN PATENT APPLICATION

(43) Date of publication:
11.04.2001 Bulletin 2001/15

(51) Int. Cl.⁷: H04B 7/005

(21) Application number: 00308692.3

(22) Date of filing: 03.10.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

(30) Priority: 06.10.1999 US 413036

(71) Applicant:
LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(72) Inventors:
• Gandhi, Asif D.
Summit, New Jersey 07901 (US)

• Ibanez, Marc Benedict
Union, New Jersey 07202 (US)
• Song, Lei
Woodbridge, New Jersey 07095 (US)
• Thomas, Mathew
Scotch Plains, New Jersey 07076 (US)
• Vitebsky, Stanley
Parsippany, New Jersey 07054 (US)


(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 0TU (GB)

(54) Method and apparatus for reverse link power control

(57) A system and a method for reverse link power control in a wireless communications network generates power adjust commands for mobiles being served by a network base station in a centralized manner by considering overall system performance when an increased interference condition is detected. In one implementation, a base station power control processor adopts a modified reverse inner loop power control (RILPC) and/or a reverse outer loop power control (ROLPC) algorithm when an increased interference condition is detected. According to the modified RILPC algorithm, a percentage of power-up adjust commands which would normally be generated when E_b/N_o measurements for served mobiles do not meet target E_b/N_o levels are converted to power down-adjust commands, thereby forcing some mobiles to reduce transmit power, at least temporarily, to constrain interference. When the increased interference condition persists, the percentage of power-up adjust commands which are converted to power-down commands may be changed. According to the modified ROLPC algorithm, the power control processor adjusts target E_b/N_o levels in a centralized manner based on an overall system state so that only a limited number of target E_b/N_o levels are allowed to increase when frame erasures occur. By preventing a percentage of target E_b/N_o level increases, at least temporarily, when frame erasures occur, a percentage of power up-adjust commands are avoided. Therefore, a similar effect to that achieved by the modified RILPC is

achieved. In accordance with still a further implementation of the present invention, the modified RILPC algorithm may be used in combination with the modified ROLPC algorithm to provide greater resistance to increased interference conditions.

FIG. 3

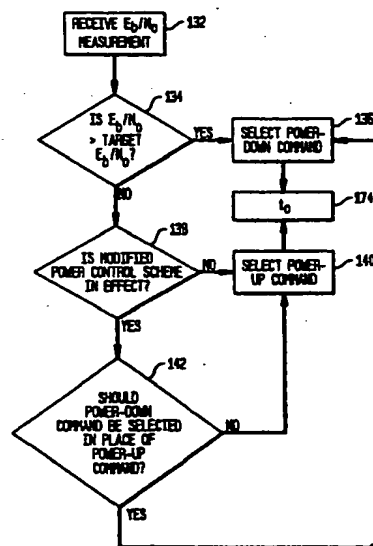

EP 1 091 503 A2

De cripti n

Field Of The Inventi n

[0001] The present invention relates to the field of wireless communications.

Description Of Related Art

[0002] In a spread spectrum communication system, such as the Code Division Multiple Access (CDMA) system specified in the IS-95 standard adopted by the U.S. Telecommunication Industry Association (TIA), a plurality of communication channels share the same radio frequency (RF) band, and are differentiated by unique codes. Each information signal to be transmitted is combined with an assigned code so that the signal appears as noise to a receiver which does not perform a corresponding despreading operation. Thus, in contrast to Time Division Multiple Access (TDMA) and Frequency Division Multiple Access (FDMA) techniques, which provide service to a plurality of mobiles using a single radio frequency (RF) band by assigning different time slots to mobiles and subdividing an RF band into a plurality of sub-bands respectively, the number of mobiles that a single cell/sector of a CDMA system can support at one time is not fixed, and instead is generally limited only by the degradation of service quality caused by interference from a other mobiles in the same or adjacent cells/sectors.

[0003] To increase network capacity, CDMA system architectures utilize reverse link (mobile to base station) transmit power control techniques to adaptively set the transmit power of each mobile being served to the minimum level needed to maintain adequate performance. Such power control techniques include two main operations: (1) reverse inner loop power control (RILPC) - in which power adjustment commands are generated based on a comparison of reverse link call quality (typically represented as the ratio of energy per bit, E_b , to interference, N_o) for each mobile being served and a target quality value; and (2) reverse outer loop power control (ROLPC) - in which the target quality value for each served mobile is adjusted to maintain acceptable frame error rates. More specifically, the base station continuously monitors reverse link E_b/N_o for each mobile being served and, in accordance with RILPC, generates either a power up-adjust or down-adjust command at predetermined intervals, typically every 1.25 milliseconds, depending on whether reverse link E_b/N_o is greater than a target E_b/N_o value assigned to the mobile (indicating acceptable call quality) or less than the target E_b/N_o value (indicating inadequate call quality). For ROLPC, the base station increases the target E_b/N_o for a corresponding mobile when a frame error is received (i.e., an erasure frame) to ensure an acceptable frame error rate for the corresponding mobile. If a non-erasure frame is received, the base station lowers

the target E_b/N_o . This process of adjusting target E_b/N_o levels for each served mobile occurs once every frame, e.g., every 20 milliseconds, and attempts to maintain an acceptable erasure rate for served mobiles while constraining reverse link transmit power on a per call or individual mobile basis (i.e., in a distributed manner).

[0004] At certain load levels, the CDMA system may experience abrupt changes in power received at a base station, for example caused by a mobile which does not comply with transmit specifications or when a served mobile comes out of a fade. As another example, the base station will issue a large number of power up-adjust commands under extremely heavy loads, thereby resulting in a sharp increase in interference at the base station. Such a sharp increase in interference will lead to an even greater number of power up-adjust commands. Because many mobiles, particularly those at cell/sector boundaries, will not be able to transmit at the power level needed to overcome the resulting rise in interference, calls may be dropped if the situation persists. Because current reverse link power control techniques are designed to work on a per call or individual mobile basis in a distributed manner, without considering the impact on resulting overall system performance, current power control algorithms do not address the above-described situation.

Summary Of The Invention

[0005] The present invention is a system and a method for reverse link power control in a wireless communications network which, according to one embodiment, generates power adjust commands for mobiles being served by a base station in a system-based, or centralized, manner by considering overall system performance during power control, rather than solely considering the state of individual mobiles, when high interference conditions occur.

[0006] In one implementation, a power control processor of a wireless network base station adopts a modified RILPC algorithm upon detecting the onset of an increased interference condition. Such an increased interference condition may be detected, for example, by monitoring absolute and/or time-differential received signal strength indicator (RSSI) measurements, the ratio of power up-adjust commands generated during a time period to total power adjust commands generated over the time period, and/or decreasing call quality (e.g., decreasing E_b/N_o) for a large fraction of users. According to the modified RILPC algorithm, the power control processor converts a percentage of power up-adjust commands to power down-adjust commands to constrain interference at the base station and preserve overall service quality. More specifically, to prevent an abrupt increase in the number of power up-adjust commands when E_b/N_o measurements do not meet target levels, a percentage of the power up-adjust commands which would normally be issued by the base station are

converted to power down-adjust commands, thereby forcing some mobiles to reduce transmit power, at least temporarily, to constrain interference. If the increased interference condition persists, the percentage of power up-adjust commands which are converted to power down-adjust commands may be changed incrementally.

[0007] Although this modified RILPC algorithm may lead to a temporary decrease in reverse link quality for some mobiles, base station coverage is maintained and overall quality is improved by constraining rises in interference levels seen at the base station. Thus, power control is performed in a system-based, or centralized, manner during an increased interference condition by allowing call quality for individual mobiles to degrade so that overall system quality may be maintained. Furthermore, because power adjust commands are issued on a sub-frame basis (e.g., 16 power adjust commands per each 20 millisecond frame), converting a percentage of power up-adjust commands to power down-adjust commands will generally result in relatively few frame erasures. After the modified RILPC algorithm has constrained the interference rise, the power control processor returns to normal operation.

[0008] In another implementation, the power control processor adopts a modified ROLPC algorithm during an increased interference condition. More specifically, the power control processor adjusts target E_b/N_o levels in a system-based, or centralized, manner instead of solely on the error rates for individual mobiles so that only a limited number of target E_b/N_o levels are allowed to increase when frame erasures occur, and/or a reduced limit on how high target E_b/N_o levels for all or a group of served mobiles may be adjusted is imposed when an increased interference condition occurs. By preventing target E_b/N_o level increases, at least temporarily, when frame erasures occur, and/or imposing a reduced limit on how high target E_b/N_o levels for all or a group of served mobiles may be adjusted, a percentage of power up-adjust commands are avoided. Therefore, a similar effect to that achieved by the modified RILPC results. According to another implementation of the present invention, the modified RILPC algorithm is combined with the modified ROLPC algorithm to provide greater resistance to increased interference conditions.

Brief Description Of The Drawings

[0009] Other aspects and advantages of the present invention will become apparent upon reading the following detailed description, and upon reference to the drawings in which:

Figure 1 is a general block diagram of an exemplary base station transmitter/receiver suitable for implementing embodiments of the present invention;

Figure 2 is a flow diagram illustrating a reverse link power control algorithm executed by the base sta-

tion transmitter/receiver according to embodiments of the present invention;

Figure 3 is a flow diagram illustrating steps for generating power adjust commands according to an embodiment of the present invention; and

Figure 4 is a flow diagram illustrating reverse outer loop power control in accordance with an embodiment of the present invention.

Detailed Description

[0010] The present invention is a system and a method for reverse link power control in a wireless communications network which constrains abrupt interference rises and power control instability by adopting a system-based, or centralized, power control algorithm when an increased interference condition is detected, such that call quality for an individual mobile(s) is allowed to degrade so that overall system quality can be maintained. In one embodiment, the present invention is a power control processor of a wireless network base station, such as a CDMA base station, which adopts a modified RILPC and/or a modified ROLPC algorithm upon detecting the increased interference condition. An illustrative embodiment of a reverse link power control system and method according to the present invention is described below.

[0011] Referring to Figure 1, there is shown a general block diagram of a transmitter/receiver 20 of a base station 10 suitable for implementing embodiments of the present invention. As shown in Figure 1, the transmitter/receiver 20 of base station 10 includes a receiver/demodulator unit 22, a power control processor 24, and a transmitter/modulator unit 26. The receiver/demodulator unit 22 receives an RF signal, Rx, from a reception antenna 30 of the base station 10, and recovers data/voice traffic from Rx, for example using well known techniques such as band-pass filtering, low noise amplification, spread spectrum processing, frequency down-conversion, demodulation, and error correction to recover data/voice traffic from mobiles being served by the base station 10.

[0012] The transmitter/modulator 26 receives a plurality of baseband communication signals input₁..., input_N, including for example voice/data traffic and control information, e.g., pilot, paging, and synchronization signals, to be transmitted to mobiles being served by the base station 10. The transmitter/modulator unit 26 also receives power adjust command bits for each mobile being served from the power control processor 24, and generates an RF transmission signal, Tx, to be transmitted by a transmit antenna 40 of the base station 10, for example using well known techniques such as convolutional encoding, spread spectrum processing, and RF carrier signal modulation.

[0013] The power control processor 24 receives a

plurality of measurements from the receiver/demodulator unit 22 which the power control processor 24 utilizes to generate power adjust commands for each mobile being served and to detect the onset of an increased interference condition, including E_b/N_o measurements and frame erasure information for each mobile being served and RSSI values. In accordance with an embodiment of the present invention, the power control processor 24 utilizes a system-based, or centralized, power control algorithm when it detects an increased interference condition; whereby call quality for an individual mobile(s) is allowed to degrade so that overall system quality may be maintained.

[0014] The operation of the power control processor 24 for generating power adjust commands in accordance with the present invention will next be described with reference to the flow diagrams of Figures 2-4. It should be realized that the power control processor 24 may be realized as a general purpose computer which executes software for performing the operations detailed below or as dedicated hardware, such as dedicated logic circuitry.

[0015] Referring to Figure 2, the power control processor 24 initially sets both a time frame index value, t_f , and an interference condition time index, t_o , to 0 (Step 105). As described below, t_f is used to indicate when a frame period (e.g., 20 milliseconds) has expired, and, thus, when ROLPC should be performed. As also described below, t_o is used to indicate how long an increased interference condition has persisted, and, thus, when parameters of the modified RILPC and/or modified ROLPC algorithms should be altered, or when an alternative remedy should be initiated.

[0016] Next, the power control processor 24 monitors base station interference levels (Step 110), and determines whether an increased interference condition exists (Step 115). In this way, the power control processor 24 recognizes the onset or continuation of an increased interference condition. The power control processor 24 may recognize an increased interference condition in various ways. For example, one approach is based on an absolute measure of reverse link interference, whereby total reverse link RSSI is compared with a threshold which is set to a level (e.g., approximately 6 dB or more) above a nominal noise floor. Another approach is based on a time-differential measure of reverse link interference, whereby average RSSI over a time window (e.g., 1 - 500 frames) is monitored and samples of average RSSI are taken periodically to detect increases. If an increase of average RSSI exceeds a threshold (e.g., 6 dB - 12 dB), an increased interference is detected. Yet another approach is to monitor the ratio of the total number of power up-adjust commands over a time window (e.g., 1 - 20 frames) to the total number of power adjust commands (i.e., up-adjusts + down-adjusts) over the same time window. If the ratio is above a threshold (e.g., 0.7 or greater), an increased interference is detected. Yet another

approach is to monitor any significant E_b/N_o reduction for a large percentage of active users over a specified period of time. One having ordinary skill in the art will readily recognize that other approaches may be utilized to detect the onset of an increased interference condition.

[0017] When the power control processor 24 determines at Step 115 that an increased interference condition does not exist, a conventional RILPC algorithm, e.g., as described in the "Background of the Invention" portion of this disclosure, is selected (Step 120), t_o is set equal to 0 (Step 121), and power up-adjust and power down-adjust commands are generated in the conventional manner (Step 130). When the power control processor 24 determines at Step 115 that an increased interference condition does exist, t_o is compared to a first time threshold, t_{L1} (Step 122), to indicate whether the increased interference condition has persisted longer than t_{L1} (e.g., t_{L1} being 1 - 20 frames). When t_o is not greater than t_{L1} , the power control processor 24 adopts a modified RILPC algorithm (Step 124) so that power adjust commands are generated at Step 130 in a manner which takes into account overall performance instead of solely on an individual mobile basis, and increments t_o by 1 (Step 125).

[0018] Figure 3 illustrates the steps of a RILPC algorithm for generating power adjust commands at Step 130 according to one implementation of the present invention. After obtaining an E_b/N_o measurement (Step 132), the power control processor 24 compares E_b/N_o with a target E_b/N_o level (Step 134) to indicate whether reverse link call quality for the corresponding mobile is adequate. When E_b/N_o exceeds the target E_b/N_o level (indicating adequate call quality), the power control processor 24 generates a power down-adjust command (Step 136), and the algorithm proceeds to Step 174 illustrated in Figure 2. When, on the other hand, E_b/N_o is not greater than the target E_b/N_o level (indicating inadequate call quality), the power control processor 24 determines whether the modified RILPC algorithm is in effect (Step 138). If the modified RILPC algorithm is not in effect, the power control processor 24 generates a power up-adjust command (Step 140), and the algorithm proceeds to Step 174 illustrated in Figure 2. When the modified RILPC algorithm has been adopted, the power control processor 24 determines whether a power down-adjust command should be selected in place of a power up-adjust command, i.e., whether a power up-adjust command for a corresponding mobile should be "converted" to a power down-adjust command (Step 142). Such a determination may be based on statistical probabilities. For example, a percentage (e.g., initially 20%) of power up-adjust commands may be randomly converted to power down-adjust commands, and the probability of such a conversion may gradually increase based on the severity of the increased interference condition or on how long the increased interference condition has persisted until the

conversion probability is 100%. Alternatively, the initial conversion probability may be set to 100%, and then gradually decreases as the increased interference condition eases. In other words, the probability may dynamically change during the increased interference condition.

[0019] When the power control processor 24 determines at Step 142 that a power adjust command conversion should occur, a power down-adjust command is selected at Step 136, and the algorithm proceeds to Step 174 shown in Figure 2. On the other hand, when the power control processor 24 determines at Step 142 that no conversion should occur, the power control processor 24 generates a power-up adjust command at Step 140, and the algorithm proceeds to Step 174 shown in Figure 2.

[0020] Referring again to Figure 2, when t_o exceeds t_{L1} , the power control processor 24 determines whether t_o is greater than a second time threshold, t_{L2} (Step 160). When t_o exceeds t_{L2} , this indicates that the modified power control techniques are not adequately constraining the increased interference condition, thereby indicating that an alternative remedy should be initiated (Step 170). For example, the power control processor 24 may initiate a handdown operation in which a mobile(s) is instructed to switch from digital service to analog service (assuming a dual mode network which provides both digital and analog service), or switch to a different transmit/receive frequency channel (assuming such an alternative frequency channel is available to the base station). After the alternative remedy has achieved a normal interference condition, initialization is again performed at Step 105.

[0021] When t_o does not exceed t_{L2} , signifying that the increased interference condition has persisted, but not the point where an alternative remedy is required, the power control processor 24 modifies parameters of the power control algorithm. For example, the probability for converting power up-adjust commands to power down-adjust commands at Step 142 may be increased or decreased each time t_o increases beyond t_{L1} as discussed above.

[0022] After power adjust commands are generated at Step 130, t_f is incremented by 1 (Step 174) and compared with a value t_{frame} to indicate whether a frame period has expired (Step 176). As discussed above, power adjust commands are generated on a sub-frame basis (e.g., 16 power adjust commands per frame). In accordance with outer loop power control, however, target E_b/N_o targets are adjusted on a frame-by-frame basis. Therefore, when the power control processor 24 determines at Step 176 that t_f does not equal t_{frame} , the processing returns to Step 110 for generating a next power adjust command. On the other hand, when t_f equals t_{frame} , outer loop power control is performed (Step 180) to adjust target E_b/N_o levels.

[0023] Figure 4 is a flow diagram illustrating outer loop power control in accordance with one implementa-

tion of the present invention. Initially, the power control processor 24 determines whether a frame erasure has occurred (Step 182), and, if not, lowers the target E_b/N_o level for the corresponding mobile (184), resets t_f to 0 (Step 185), and returns to Step 110 to perform RILPC. When a frame erasure has occurred, however, the power control processor 24 recognizes whether the modified power control scheme is in effect (i.e., as indicated by the determination at Step 115). When the modified power control scheme is not in effect, the power control processor 24 increases the target E_b/N_o level for the corresponding mobile (Step 188), resets t_f to 0 (Step 185), and returns to Step 110 to perform RILPC. When the modified power control scheme is in effect, the power control processor 24 determines whether the target E_b/N_o level for the corresponding mobile should be allowed to increase (Step 190). For example, a probability may be assigned for allowing target E_b/N_o levels to increase such that, even when a frame erasure has occurred, target E_b/N_o levels may stay the same or actually be decreased (Step 192) instead of increased (Step 188). After maintaining or decreasing target E_b/N_o levels at Step 192, t_f is reset to 0 (Step 185), and the power control algorithm returns to Step 110 to perform RILPC. By maintaining or decreasing, instead of increasing, target E_b/N_o levels, even when frame erasures occur, the power control processor 24 will generate fewer power up-adjust commands during RILPC, thereby containing increases in interference.

[0024] When determining whether to allow an increase in a mobile's target E_b/N_o , the recent frame error history of the mobile may be considered such that, for example, an increase in a mobile's target E_b/N_o is allowed when consecutive frame erasures for the corresponding mobile have occurred. Again, the procedure of Step 165 may be utilized to alter the probabilities of allowing an increase in target E_b/N_o levels depending on the difference between t_o and t_{L1} .

[0025] As an alternative, or in addition to, the modified ROLPC algorithm described above, the power control processor 24 may impose a reduced limit on how high target E_b/N_o levels for all or a group of served mobiles may be increased when an increased interference condition occurs.

[0026] Although the implementation described above with reference to the flow diagrams of Figures 2-4 relied on a combination of a modified RILPC algorithm and a modified ROLPC algorithm, it should be realized that one of the modified RILPC algorithm and the modified ROLPC algorithm may be used as an alternative implementation. Furthermore, another alternative implementation may utilize only one of the modified RILPC algorithm and the modified ROLPC algorithm at the outset of an increased interference condition, and utilize both the modified RILPC algorithm and the modified ROLPC algorithm when the increased interference condition is severe or persists longer than a time threshold. As yet another mechanism for controlling an

increased interference condition, target frame error rates may be increased during an increased interference condition, and/or accelerated power down-adjust commands may be utilized.

[0027] By adopting a modified power control scheme, such as any one or a combination of multiple techniques described above, which operates in a centralized manner by taking overall performance into account when an increased interference condition has been detected, interference "runaway" is avoided, and reverse link coverage and overall service quality is maintained.

[0028] It should be apparent to this skill in the art that various modifications and applications are contemplated which may be realized without departing from the scope of the present invention.

Claims

1. A method for generating transmit power adjust commands in a wireless communications network comprising:

detecting interference conditions; and

generating power adjust commands in accordance with a system-based power control operation when said detecting step detects an increased interference condition.

2. The method of claim 1, further comprising:

returning to a normal power control operation after the increased interference condition has eased.

3. The method of claim 1, further comprising:

generating power adjust commands for the mobile in accordance with an individual mobile-based power control operation when said detecting step does not detect an increased interference condition.

4. The method of claim 1, wherein said system-based power control operation includes:

comparing a signal-to-interference measurement for the mobile with a target signal-to-interference level for the mobile;

generating a power down-adjust command when the signal-to-interference measurement for the mobile is greater than the target signal-to-interference level for the mobile; and

determining whether to generate a power down-adjust command when the signal-to-

interference measurement for the mobile is less than the target signal-to-interference level for the mobile.

5. The method of claim 4, wherein said determining step determines whether to generate a power down-adjust command when the signal-to-interference measurement for the mobile is less than the target signal-to-interference level for the mobile based on a statistical probability.

6. The method of claim 1, wherein said system-based power control operation includes:

generating a power adjust command based on a comparison of a signal-to-interference measurement for the mobile and a target signal-to-interference level for the mobile;

judging whether an erasure frame has been received for the mobile; and

determining whether to adjust the target signal-to-interference level for the mobile when an erasure frame has been received for the mobile.

7. The method of claim 6, wherein said determining step determines whether to adjust the target signal-to-interference level for the mobile when an erasure frame has been received for the mobile based on a statistical probability.

8. The method of claim 4, wherein said system-based power control operation further includes:

judging whether an erasure frame has been received for the mobile; and

determining whether to adjust the target signal-to-interference level for the mobile when an erasure frame has been received for the mobile.

9. The method of claim 1, wherein said system-based power control operation further includes:

lowering a limit on how high target signal-to-interference levels may be increased during an outer loop power control operation.

10. The method of claim 1, further comprising:

determining whether an increased interference condition detected by said detecting step has persisted for a predetermined time period; and adjusting a parameter of the system-based power control operation when said determining

step indicates that an increased interference condition detected by said detecting step has persisted for the predetermined time period.

11. The method of claim 5 or claim 7, wherein the statistical probability is variable. 5
12. The method of claim 1, wherein said detecting step monitors changes in total reverse link signal strength at the base station. 10
13. The method of claim 1, wherein said detecting step monitors absolute total reverse link signal strength.
14. The method of claim 1, wherein said detecting step monitors a ratio of power up-adjust commands to total power adjust commands. 15
15. The method of claim 1, wherein said detecting step monitors signal-to-interference levels for a plurality of mobiles. 20
16. A method for generating transmit power adjust commands in a wireless communications network comprising: 25
 - detecting interference conditions;
 - selecting a first power control scheme when said detecting step does not detect an increased interference condition; 30
 - selecting a second power control scheme when said detecting step detects an increased interference condition; and
 - generating power adjust commands based on the selected power control scheme. 35
17. The method of claim 16, wherein the second power control scheme is a modified reverse inner loop power control scheme. 40
18. The method of claim 16, wherein the second power control scheme is a modified reverse outer loop power control scheme.
19. A power control system for generating transmit power adjust commands in a wireless communications network, comprising means for carrying out the steps of a method as claimed in any of the preceding claims. 45

50

55

FIG. 1

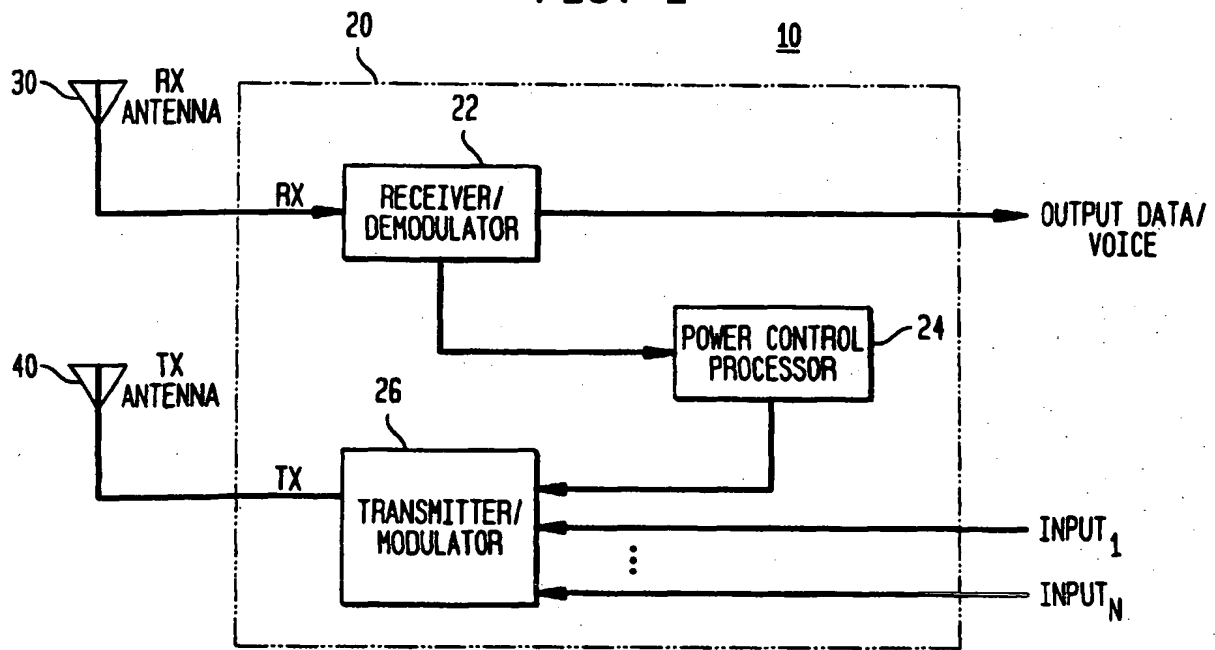


FIG. 2

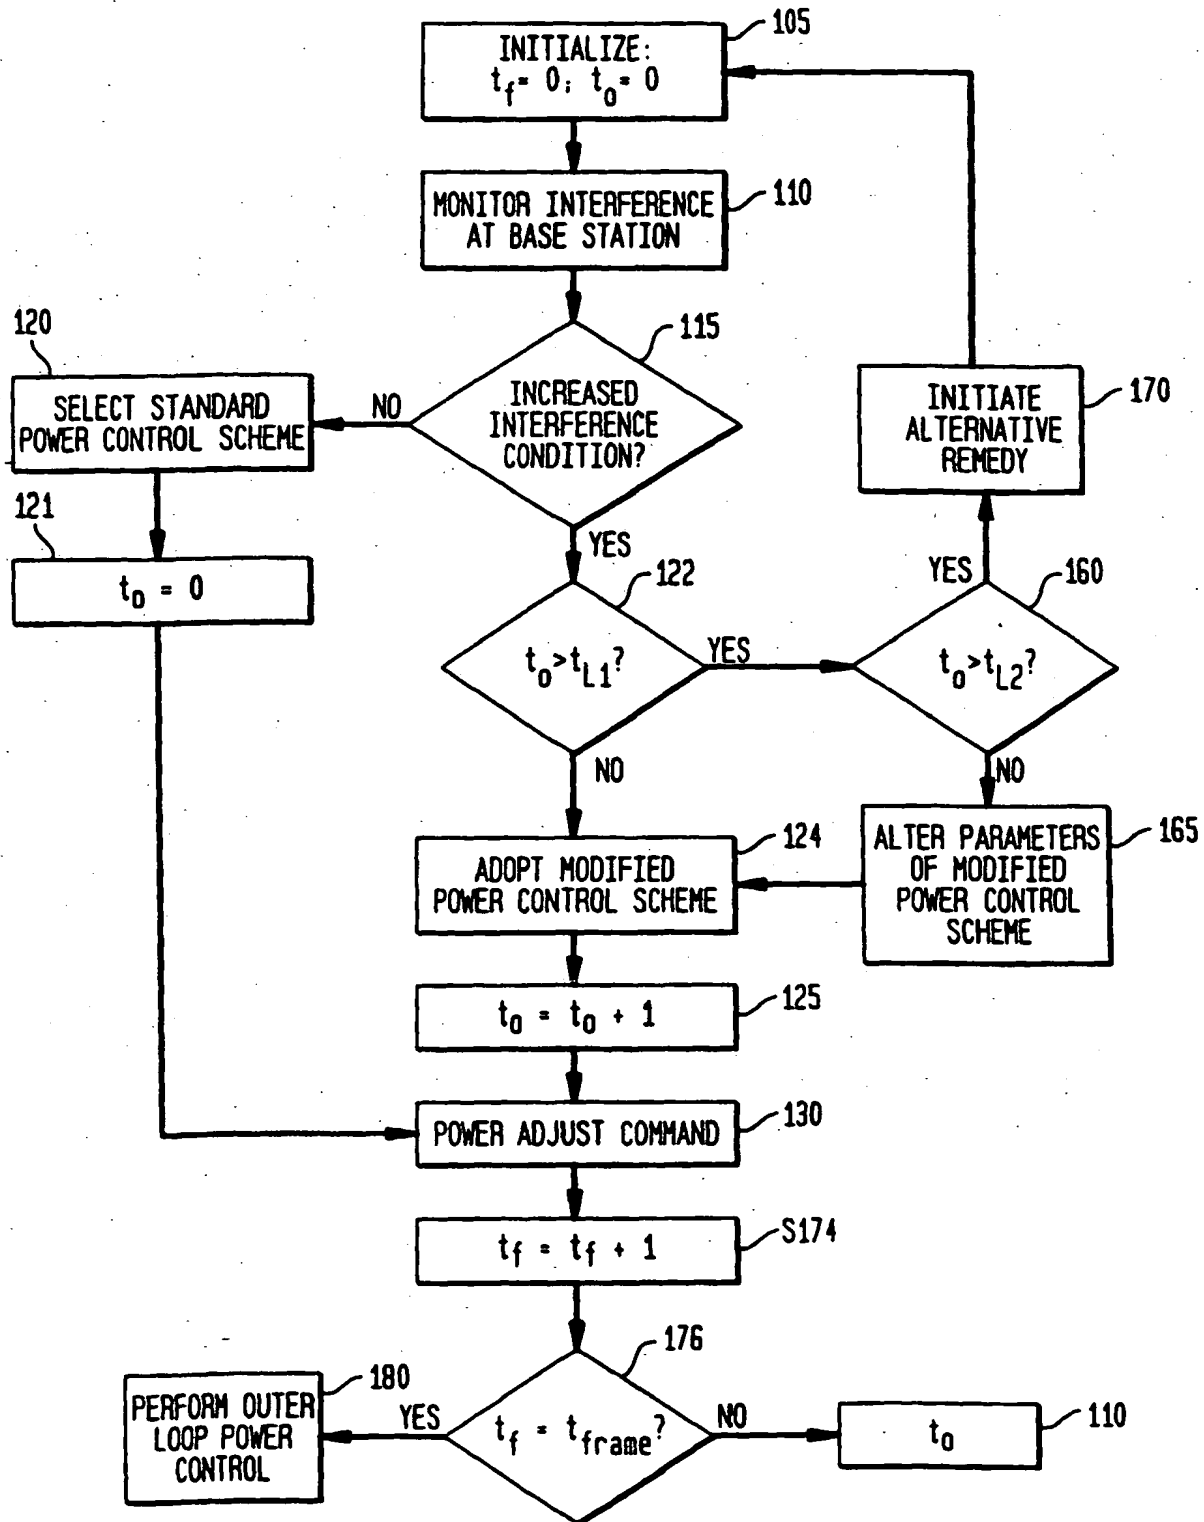


FIG. 3


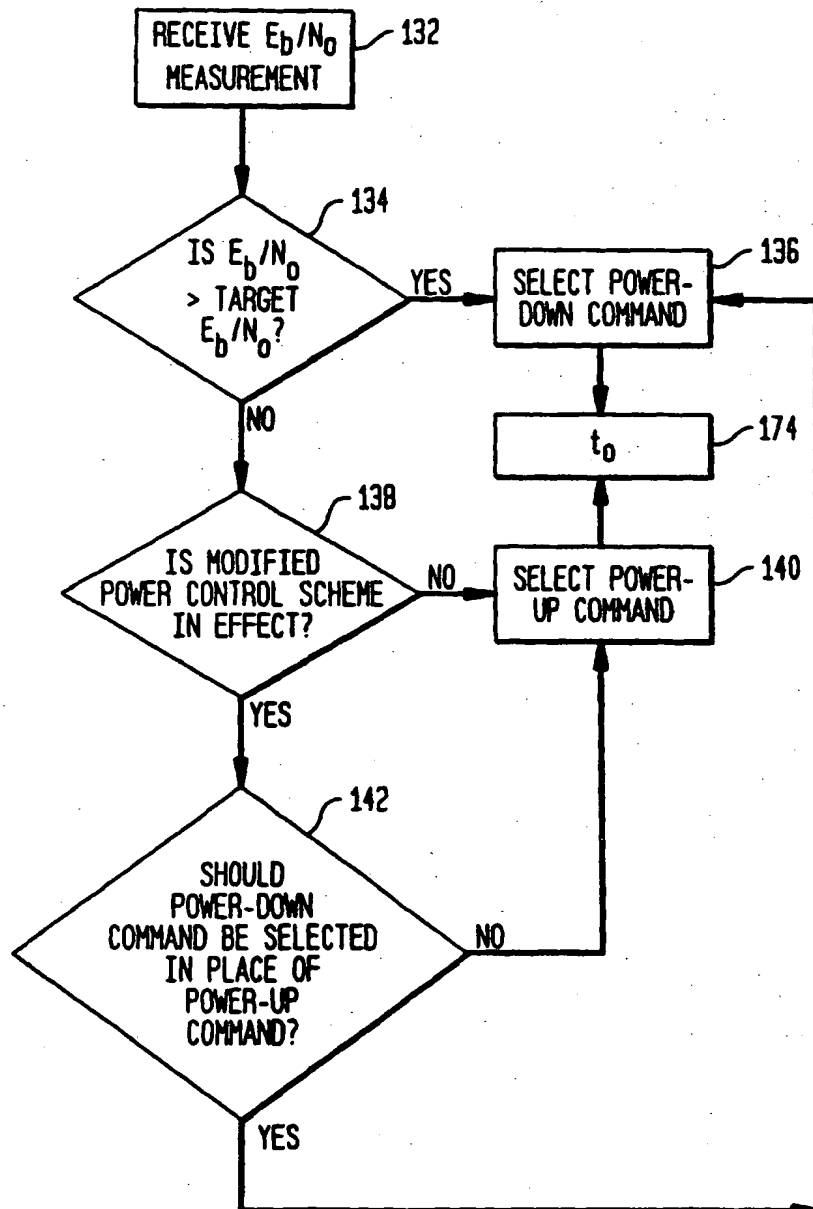


FIG. 4



(19)

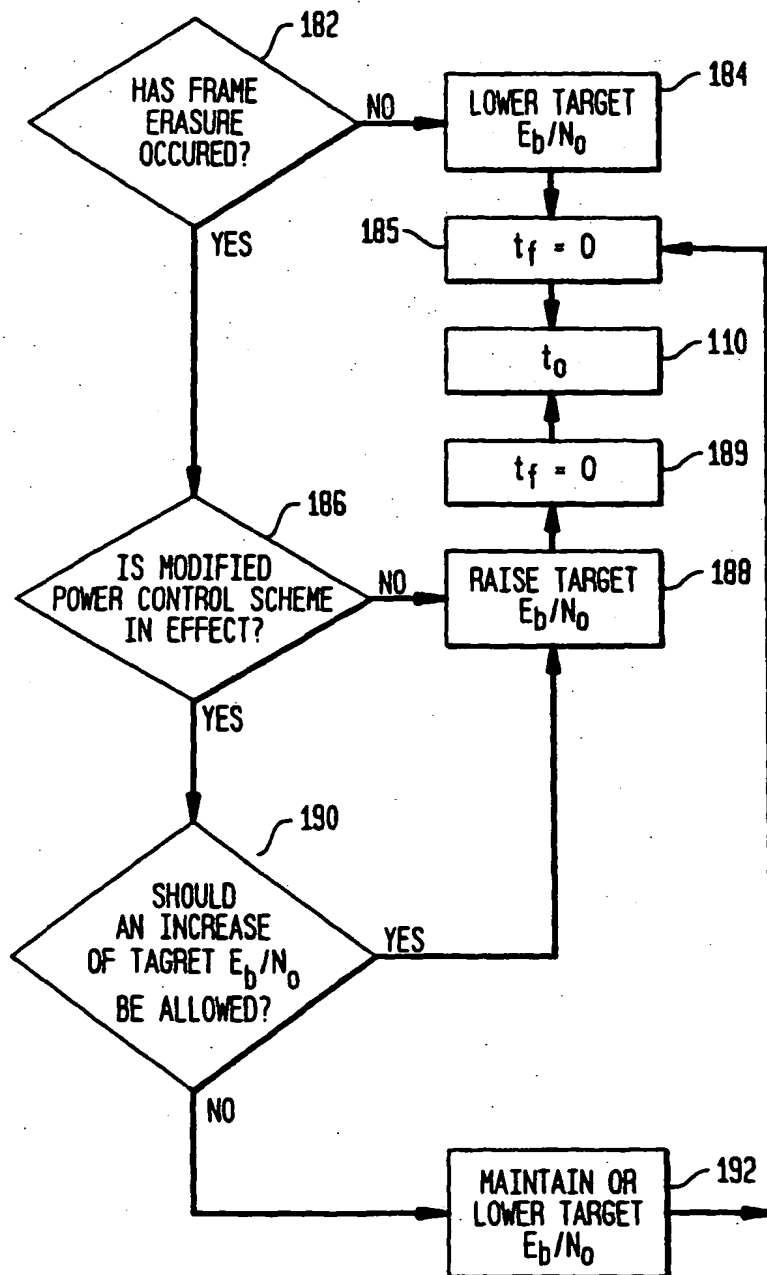

Europäisches Patentamt
European Patent Office
Office européen des brevets



(11)

EP 1 091 503 A3

(12)

EUROPEAN PATENT APPLICATION

(88) Date of publication A3:
09.07.2003 Bulletin 2003/28

(51) Int Cl.7: H04B 7/005

(43) Date of publication A2:
11.04.2001 Bulletin 2001/15

(21) Application number: 00308692.3

(22) Date of filing: 03.10.2000

(84) Designated Contracting States:
AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU
MC NL PT SE
Designated Extension States:
AL LT LV MK RO SI

• Ibanez, Marc Benedict
Union, New Jersey 07202 (US)
• Song, Lei
Woodbridge, New Jersey 07095 (US)
• Thomas, Mathew
Scotch Plains, New Jersey 07076 (US)
• Vitebsky, Stanley
Parsippany, New Jersey 07054 (US)

(30) Priority: 06.10.1999 US 413036

(71) Applicant: LUCENT TECHNOLOGIES INC.
Murray Hill, New Jersey 07974-0636 (US)

(74) Representative:
Watts, Christopher Malcolm Kelway, Dr. et al
Lucent Technologies (UK) Ltd,
5 Mornington Road
Woodford Green Essex, IG8 0TU (GB)


(72) Inventors:
• Gandhi, Asif D.
Summit, New Jersey 07901 (US)

(54) Method and apparatus for reverse link power control

(57) A system and a method for reverse link power control in a wireless communications network generates power adjust commands for mobiles being served by a network base station in a centralized manner by considering overall system performance when an increased interference condition is detected. In one implementation, a base station power control processor adopts a modified reverse inner loop power control (RILPC) and/or a reverse outer loop power control (ROLPC) algorithm when an increased interference condition is detected. According to the modified RILPC algorithm, a percentage of power-up adjust commands which would normally be generated when E_b/N_o measurements for served mobiles do not meet target E_b/N_o levels are converted to power down-adjust commands, thereby forcing some mobiles to reduce transmit power, at least temporarily, to constrain interference. When the increased interference condition persists, the percentage of power-up adjust commands which are converted to power-down commands may be changed. According to the modified ROLPC algorithm, the power control processor adjusts target E_b/N_o levels in a centralized manner based on an overall system state so that only a limited number of target E_b/N_o levels are allowed to increase when frame erasures occur. By preventing a percentage of target E_b/N_o level increases, at least temporarily, when frame erasures occur, a percentage of power up-adjust com-

mands are avoided. Therefore, a similar effect to that achieved by the modified RILPC is achieved. In accordance with still a further implementation of the present invention, the modified RILPC algorithm may be used in combination with the modified ROLPC algorithm to provide greater resistance to increased interference conditions.

FIG. 3

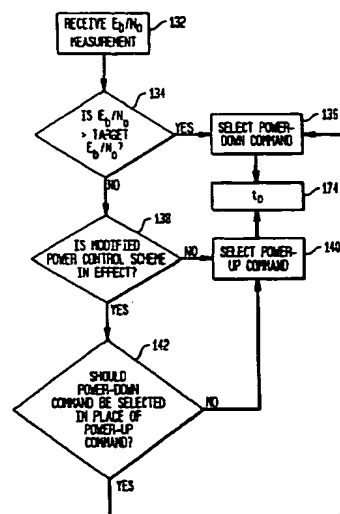

EP 1 091 503 A3



European Patent
Office

EUROPEAN SEARCH REPORT

Application Number
EP 00 30 8692

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	US 5 604 730 A (TIEDEMANN JR EDWARD G) 18 February 1997 (1997-02-18)	1-3, 16, 19	H04B7/005
Y	* column 4, line 8 - line 25 * * column 7, line 30 - line 48 * * figure 1 *	6, 9, 10	
X	EP 0 762 688 A (NIPPON ELECTRIC CO) 12 March 1997 (1997-03-12)	1-3, 16, 19	
A	* column 1, line 5 - line 42 * * column 6, line 34 - column 7, line 4 *	6, 9, 10	
Y	US 5 778 030 A (BRUCKERT EUGENE J ET AL) 7 July 1998 (1998-07-07)	6	TECHNICAL FIELDS SEARCHED (Int.Cl.7) H04B
	* abstract * * figure 4 * * column 1, line 48 - line 57 * * column 2, line 33 - line 38 * * column 3, line 28 - line 35 *		
Y	EP 0 917 302 A (MATSUSHITA ELECTRIC IND CO LTD) 19 May 1999 (1999-05-19)	9, 10	
	* page 5, line 28 - line 40 * * column 6, line 20 - line 22 * * column 7, line 7 - line 38 * * column 10, line 12 - line 38 * * column 11, line 17 - line 27 *		
The present search report has been drawn up for all claims			
Place of search THE HAGUE		Date of completion of the search 16 May 2003	Examiner Lustrini, D
CATEGORY OF CITED DOCUMENTS X: particularly relevant if taken alone Y: particularly relevant if combined with another document of the same category A: technological background O: non-written disclosure P: intermediate document T: theory or principle underlying the invention E: earlier patent document, but published on, or after the filing date D: document cited in the application L: document cited for other reasons &: member of the same patent family, corresponding document			

EPO FORM 1503 (03.02) (P04001)

**ANNEX TO THE EUROPEAN SEARCH REPORT
ON EUROPEAN PATENT APPLICATION NO.**

EP 00 30 8692

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

16-05-2003

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
US 5604730	A	18-02-1997	AU 701510 B2	28-01-1999
			AU 3003195 A	22-02-1996
			BR 9508428 A	23-12-1997
			CA 2195984 A1	08-02-1996
			CN 1375942 A	23-10-2002
			CN 1375952 A	23-10-2002
			CN 1162376 A ,B	15-10-1997
			EP 1139581 A2	04-10-2001
			EP 0774179 A1	21-05-1997
			FI 970319 A	13-03-1997
			IL 114703 A	06-12-1998
			JP 10503337 T	24-03-1998
			JP 3078330 B2	21-08-2000
			WO 9603813 A1	08-02-1996
			ZA 9505843 A	15-03-1996
EP 0762688	A	12-03-1997	JP 2768320 B2	25-06-1998
			JP 9068660 A	11-03-1997
			EP 0762688 A2	12-03-1997
			US 5781332 A	14-07-1998
US 5778030	A	07-07-1998	BR 9702091 A	20-07-1999
			CA 2219997 A1	18-09-1997
			CN 1182508 A	20-05-1998
			EP 0826273 A1	04-03-1998
			JP 11506899 T	15-06-1999
			KR 252804 B1	15-04-2000
			WO 9734372 A1	18-09-1997
EP 0917302	A	19-05-1999	JP 11145899 A	28-05-1999
			CA 2235382 C	30-10-2001
			CN 1218342 A	02-06-1999
			DE 69800961 D1	26-07-2001
			DE 69800961 T2	04-10-2001
			EP 0917302 A1	19-05-1999
			US 6138033 A	24-10-2000

THIS PAGE BLANK (USPTO)